


70 Volt Amplifier Input  
(Primary)

Speaker Output  
(Secondary)

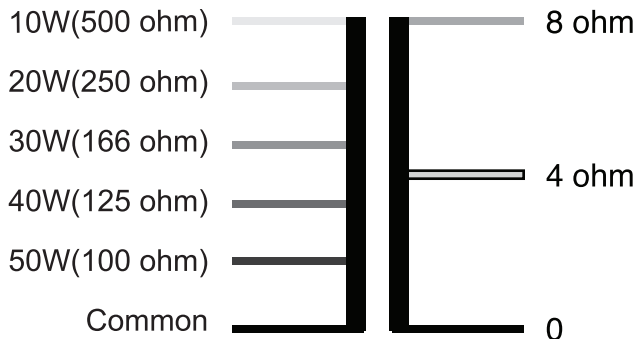

**SPECIFICATIONS**

Primary Voltage:	70V
Power Rating:	50W
Primary Taps:	50, 40, 30, 20, 10 W
Secondary Impedance:	8, 4 ohms
Insertion Loss:	1dB
Frequency Response:	20Hz - 20kHz ±1dB
Lead Length:	6"
Weight (lbs.):	1.1
Mounting Dimensions:	3.37"W x 2"D x 2"H
Mounting Method:	Self-Adhesive Pad